

Notice to All Bidders:

The attention of Bidders submitting proposals for addition to Base Security System project indicated above is called to the following Addendum to the Plans and Specifications. The revisions set forth herein, whether of omission, addition or substitution, are to be included in and form a part of the Proposal submitted.

The number of this Addendum must be entered in the space provided on the Bid Form.

Changes to the Statement of Work:


Change paragraph C-3.b.4.a to read: "Install a government furnished, fixed ceiling camera ([24V BURLE Model TC592](#)) in Room 31, to continuously observe the door between Room 31 and Room 11. Install a government furnished monitor ([Phillips Model PA5020 C204](#)) in Room 08, for the fixed camera;"

Add paragraph C-3.b.6.b: "[Communications enter the structure in the control room which is located in the Northwest corner, approximately 60 feet horizontal and 30 feet vertical from the proposed camera location \(Plans of this structure are not available\). Camera will be mounted on structural steel, hangar door support structure](#)".


Change paragraph C-3.c. to read: "Provide all cables and conduit from the new installed devices to the governments communication system([CAT 3, 22 ga. copper telephone lines](#)) in each building. Then from the governments communication system to [Central](#) Security Control ([CSC](#)) System, ~~in CSC in~~ Bldg 78. All cables run above ceilings shall be plenum type. [All conductor run below 8 feet above the floor and exposed, or where the possibility of damage/tampering is high, shall be run in EMT.](#) All new equipment shall be monitored and controlled by the Security System in CSC, Bldg 78. Add six (6) monitors to the existing console. Contractor shall coordinate with Security Forces to reassign video input to the digital recorder to include video input from any of the new cameras provided in this contract."

Changes to the Specifications: N/A

Changes to the Drawings:

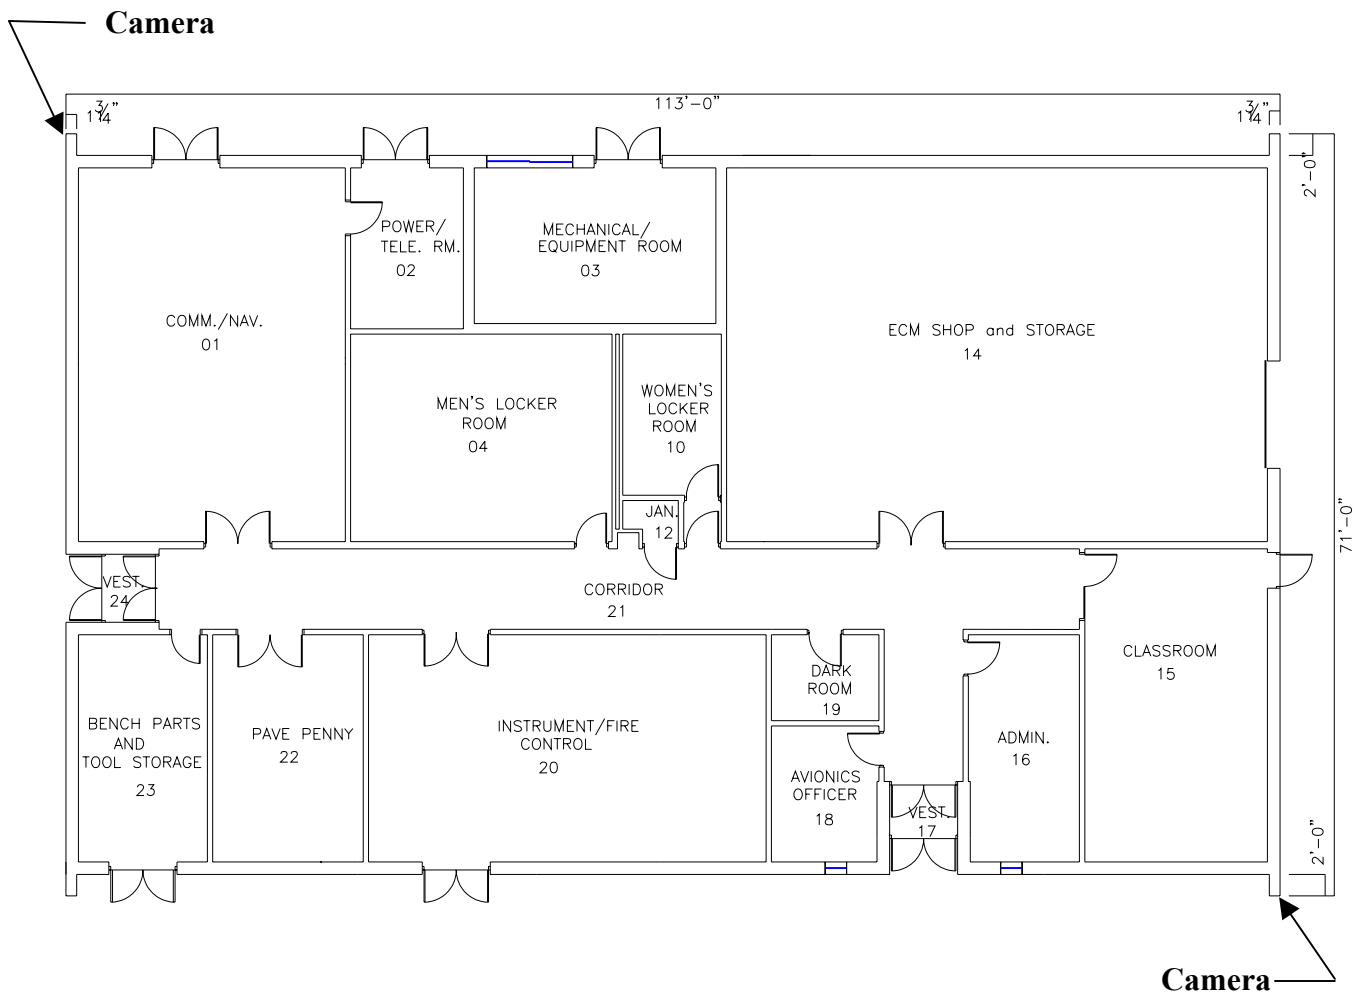

Building 18

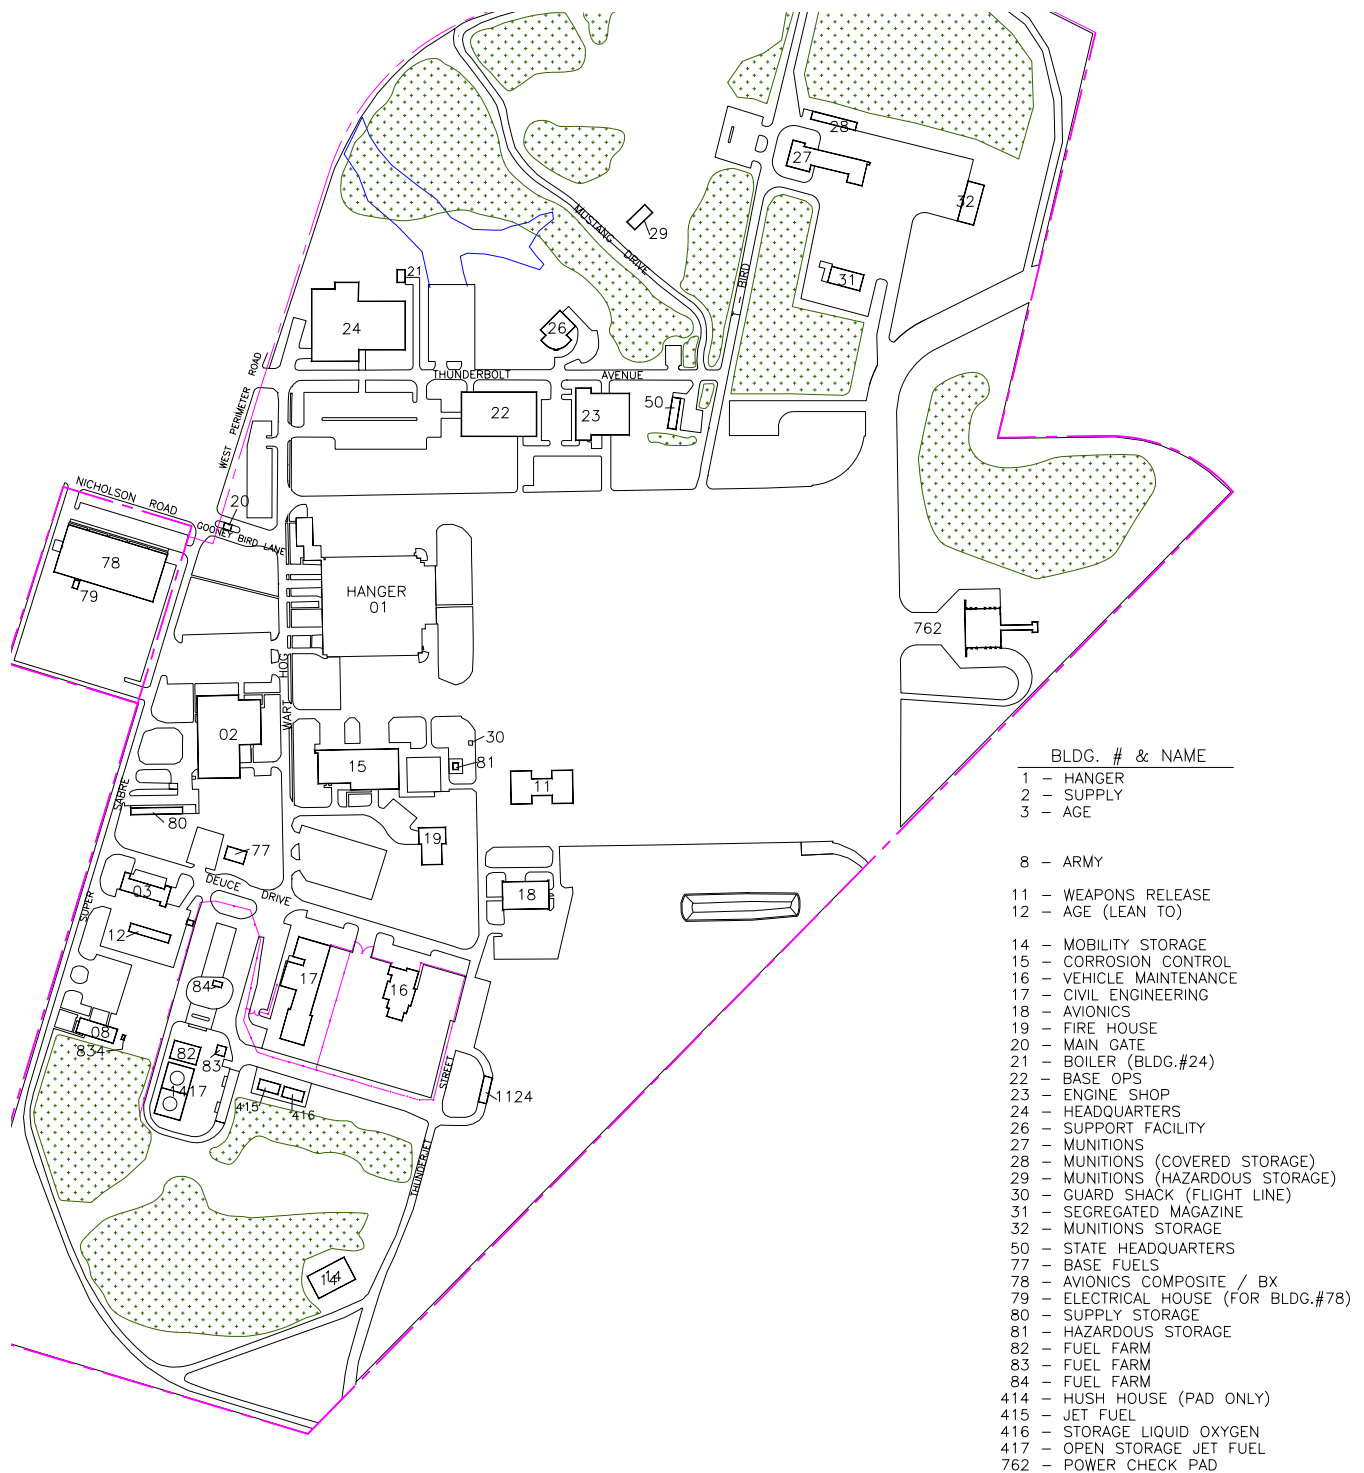

End of Addendum No. 2